

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



B 8

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04B 7/26	A1	(11) International Publication Number: WO 95/19071 (43) International Publication Date: 13 July 1995 (13.07.95)
(21) International Application Number: PCT/IB95/00009 (22) International Filing Date: 4 January 1995 (04.01.95) (30) Priority Data: 9400253.2 7 January 1994 (07.01.94) GB (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-16485 Stockholm (SE). (71) Applicant (for GB only): PHILIPS ELECTRONICS UK LIMITED [GB/GB]; 420-430 London Road, Croydon CR9 3QR (GB). (72) Inventors: ELLIOTT, Patrick, William; Flat 7, Well House, High Street, Nutfield, Surrey RH1 4HQ (GB). KANAROPOULOS, Nikolaou, Theologos; 28 Kinsdale Drive, Bradford, West Yorkshire BD2 4DB (GB). (74) Agent: DE JONGH, Cornelis, Dominicus; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		(81) Designated States: JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: TDMA COMMUNICATION SYSTEM (57) Abstract <p>A multi-slot TDMA communications system, such as DECT, has provision for allocating full time slots and double time slots to calls. However, whereas full time slot calls are normally assigned to what a subscriber unit or base station has determined as the best time slot, a double time slot call is constrained by having to start with an even numbered time slot in a frame. This can lead to an inferior grade of service for double time slot calls because during call set up, although there may be free full time slots, they are not always arranged as pairs with the first time slot being even numbered. A modified slot selection algorithm is proposed in which whenever possible a full time slot call is assigned to an acceptable inactive time slot located adjacent to an active full time slot in a frame, even though this may mean that it is not the best inactive time slot.</p> <div data-bbox="503 1144 1477 1407"></div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

DESCRIPTION

TDMA COMMUNICATION SYSTEM

TECHNICAL FIELD

5 The present invention relates to slot selection in multi-slot Time Division Multiple Access (TDMA) communication systems, such as the Digital European Cordless Telephone System, DECT, and to a subscriber unit having means for controlling slot selection.

BACKGROUND ART

10 For convenience of description the present invention will be described in the context of DECT but it is to be understood that the present invention can be applied to other TDMA communication systems having different widths of time slots.

15 In the DECT system, when a subscriber unit wishes to make a call, it will as a preliminary step scan all the duplex voice channels on all the frequency channels in order to determine the best available or inactive duplex voice channel and select that one. Thereafter it transmits on the selected channel or time slot. This type of channel selection is generally termed dynamic channel selection.

20 The DECT standard as described in ETS 300 175-1 Part 1: Overview, Section 6 pages 24 and 25, describes the basic technical characteristics of the system as comprising 10 frequency carriers, each having a TDMA multiplex of 24 time slots per frame of which 12 time slots are transmit slots and 12 time slots are receive slots. A basic
25 duplexing is time division duplex (TDD) using two time slots on the same carrier. In applying dynamic channel selection, a subscriber is not constrained in choosing a time slot for a full-slot transmission.

 The DECT standard ETS 300 175-2 Part 2 : Physical Layer Section 4.2.1. specifies the frame, full-slot and half slot structure. This section

also mentions a double slot structure which has a length of two full time slots and specifies that a double slot starts concurrently with an even numbered full slot. Thus when a subscriber unit wants to initiate a transmission requiring a double slot, the dynamic channel selection procedure has to be constrained by having to look for an acceptable double slot commencing with an even numbered full slot. Simulations which have been carried out in respect of mixing different types of services taking advantage of different slot types shows that there is a non-trivial degradation of the Grade of Service (GOS) when the existing double slot selection protocol is adhered to.

DISCLOSURE OF THE INVENTION

An object of the present invention is to improve the Grade of Service when using different slot types.

According to one aspect of the present invention there is provided a time division multiple access (TDMA) communication system comprising a plurality of subscriber units, each unit comprising radio transceiving means and control means, the control means including means responsive to a request to initiate a call for scanning duplex voice channels comprising complementary time slots in a TDMA frame; means for determining the quality of at least each inactive time slot and forming a channel map, and means for selecting for a full time slot transmission an inactive full time slot of an acceptable quality which is located adjacent to an active full time slot in the frame.

The present invention is based on the recognition of the problem that unconstrained dynamic channel selection based on choosing the best available inactive time slot may reduce the number of possible available double slots. However by modifying the dynamic channel selection algorithm so that the time slot selected for a full time slot call is located adjacent an active full time slot, this will increase the number

of double slots and thereby enable an improved GOS to be achieved. This modified dynamic channel selection algorithm may also be applied when assigning half time slot calls vis à vis full time slot call.

5 According to another aspect of the present invention there is provided a subscriber unit for use in a time division multiple access (TDMA) communication system, comprising radio transceiving means, control means, means for determining the quality of a TDMA physical channel and a channel map store, wherein the control means in response to a call request for a full time slot transmission has means for
10 determining which of the inactive physical channels in the channel map store is of an acceptable quality and means for initiating a transmission in an inactive full time slot channel of an acceptable quality located adjacent a full time slot active channel.

15 By selecting an odd numbered inactive time slot which is adjacent a full even numbered active time slot or vice versa to form a pseudo-double slot then this will increase the number of possible available double slots.

20 When implementing the present invention a compromise may be necessary to the normal rule of dynamic channel selection because in order allocate a full time slot call to an inactive TDMA time slot which is adjacent an active TDMA time slot, it may be necessary to choose the second best or third best inactive time slot which in any event is acceptable.

BRIEF DESCRIPTION OF DRAWINGS

25 The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 illustrates diagrammatically a base station and 2 subscriber units, which may be fixed or portable, in a cordless telephone system,

Figure 2 illustrates the framing structure of a DECT frequency channel,

Figure 3 illustrates an example of various slot structures in a DECT frame,

5 Figure 4 is a block schematic diagram of a subscriber unit,

Figure 5 is a flow chart of a channel selection algorithm, and

Figures 6, 7 and 8 are graphs illustrating, respectively, the grades of service (GOS) between applying the normal DECT channel selection algorithm (circles) and the channel selection algorithm (triangles) described with reference to Figure 5.

10 In the drawings the same reference numerals have been used to indicate corresponding features.

MODE FOR CARRYING OUT THE INVENTION

Figure 1 illustrates diagrammatically a cordless telephone system comprising a base station 10 and two subscriber units 12, 14. The subscriber unit 12 is a portable unit and the unit 14 comprises a data terminal which is fixedly sited. The base station 10 comprises a transceiver 16 which is controlled by a microcontroller 18. A modem 20 is coupled between the controller 18 and a landline such as the PSTN. Each subscriber unit 12, 14 comprises a transceiver 22 which is controlled by a microcontroller 24. A more detailed description of a subscriber unit will be given later with reference to Figure 4.

25 As mentioned in the preamble, communication between the base station 10 and a subscriber unit 12 or 14 is in accordance with a TDMA protocol comprising a frequency channel which divided into a succession of time frames F, each frame comprising a plurality of time slots (or physical channels) of which 50% are nominally devoted to forward transmission from the base station and 50% are nominally devoted to reverse transmission. Generally correspondingly numbered

forward and reverse time slots (termed duplex voice pair) are allocated to a call.

Figure 2 shows the basic frame structure for DECT which comprises 24 time slots of which the first 12 are referenced T_0 to T_{11} and the second 12 are referenced R_0 to R_{11} . Referring to Figure 3, for a speech call DECT allocates a full time slot in each direction for example duplex voice pair T_8, R_8 . The requirements for data vary according to the type of data subscriber unit. For communication with low rate data subscriber units, DECT gives the option of allocating half a time slot in each direction, see for example time slots T_4, R_4 . Alternatively for communication with high rate data subscriber terminals, DECT has provision for allocating a double time slot in each direction, see for example time slots T_2, T_3 and R_2, R_3 . According to the DECT protocol a double time slot must start with an even numbered time slot, that is 0, 2, 4, 6, 8, or 10.

If full time slot calls are allocated entirely on a dynamic channel allocation basis it is possible that for example six calls are allocated such that there are no double time slots available with the result that the GOS for high rate data services is zero. Looking at Figure 3 and assuming that the duplex voice channel T_8, R_8 has been allocated, if a subscriber unit requiring a full slot determines after scanning the physical channels that the physical channel T_6 is the best available channel and that channels T_9 and T_{10} are the second and the third best and in any event are acceptable, then under the dynamic channel allocation algorithm, it will grab T_6, R_6 . However by doing so, it has denied a high rate data subscriber unit of the possibility of a double slot at $(T_6, T_7)(R_6, R_7)$. If the channel allocation algorithm is modified so that an available (or inactive) physical channel must be not only acceptable but also adjacent another already allocated (or active) time slot, the

result may be that a larger number of free double slots will be available than would be possible if the best time slot is selected. In the present example, if time slots T_9, R_9 are allocated to a full slot call, the distribution of non-allocated (or inactive) time slots which could be assigned as double time slots in conformance with the DECT protocol is not affected.

The subscriber unit SU shown in Figure 4 is capable of transmitting and receiving data and digitised speech as alternatives. A transceiver 26 is connected on the one hand to an antenna 28 and on the other hand to a burst mode controller (BMC) 30 and to means 32 for deriving radio signal strength indications (RSSI) in respect of a received signal. The BMC 30 is controlled by a microcontroller 34 to which is connected a keypad 36, a liquid crystal display (LCD) panel 37, a channel map store 38, a control program 40 and a random access memory (RAM) 42.

Speech or data are alternatively selected by change-over switches 44,46 which are actuated in response to signals generated by the microcontroller 34.

In the position of the switches 44,46 shown, the BMC 30 relays compressed digitised speech signals via the switch 44 to an Adaptive Differential Pulse Code Modulator (ADPCM) 48 which is connected by an audio frequency codec 50 to a loudspeaker 52. A microphone 54 is connected to the codec 50. Digitised coded speech signals from the ADPCM 48 are relayed by the switch 46 to the BMC 30.

In the alternative position of the switches 44,46, a modem which is connected to a data terminal 56 is able to receive data signals from, and send data signals to, the BMC 30. When idle, the microcontroller 34 scans all the channels available and stores the quality of each channel in the channel map store. The subscriber unit SU when

wanting to make an outgoing call selects a physical channel in response to an algorithm held in the control program 40.

5 The algorithm is shown in Figure 5 and commences with block 60 which asks the question "Is the call a full slot call?" If the answer is No (N) then the existing DECT dynamic channel selection algorithm, block 62, is used because the call is either a half slot call or a double slot call. However if the answer is Yes (Y) then in block 64, the channel map is searched. In block 66 the question is asked "Is the slot an odd
10 numbered full slot?" If the answer is No (N), the physical channel in the channel map store is marked as a possible channel next adjacent to an odd numbered full slot, block 68. In block 70 a check is made to see if the search is finished, if the answer is No (N), the algorithm reverts to the block 64.

15 If the answer to the question in block 66 is Yes (Y) then in block 72 the physical channel is marked as a possible channel next adjacent an even numbered full slot. In block 74 a check is made to see if the search is finished, if the answer is No (N), the algorithm reverts to the block 64.

20 If the answer to blocks 70 and 74 is Yes (Y) , a list of the best RSSI marked slots is made, block 76. Then a check is made to see if the RSSI is greater than an arbitrary threshold value, block 78. If the answer is No (N), then in block 80 a check is made to see if it is the last RSSI and if it is not (N) then the algorithm reverts to the block 78. If the answer to the check made in the block 78 is Yes(Y), then the
25 channel is assigned, block 82. If the answer to the check made in the block 80 is Yes (Y) then the existing DECT channel selection algorithm is applied, block 84.

Figures 6, 7 and 8 illustrated graphically the results of simulating a mixed slot environment comprising 10% double slot duplex

connections, indicated as 10% DS, and 90% full slot connections using the normal DECT slot selection algorithm (circles) and the algorithm described with reference to Figure 5 (triangles). Figure 6 considers the double slot grade of service with increasing offered traffic measured in Erlangs (Erl). The new algorithm provides acceptable service to double slot calls ($GOS < 1\%$) at an offered traffic level which is nearly 30% greater than for the normal DECT algorithm. Figure 7 illustrates that the full slot performance is marginally reduced when using the new algorithm. However as shown in Figure 8 the overall GOS is improved. The marginally worse performance of full slot transmissions is due to the fact that during the set up procedure the slot position selected is not necessarily the best (least interfered) one, but is the best location adjacent to another active full slot in the frame.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of cordless telephones and component parts thereof and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application of or any further application derived therefrom.

INDUSTRIAL APPLICABILITY

TDMA communications systems such as Digital European Cordless Telephone System (DECT).

CLAIMS

1. A time division multiple access (TDMA) communication system comprising a plurality of subscriber units, each unit comprising radio transceiving means and control means, the control means including means responsive to a request to initiate a call for scanning duplex voice channels comprising complementary time slots in a TDMA frame; means for determining the quality of at least each inactive time slot and forming a channel map, and means for selecting for a full time slot transmission an inactive full time slot of an acceptable quality which is located adjacent to an active full time slot in the frame.

2. A system as claimed in claim 1, wherein the time slots in a frame are numbered in an ascending order, characterised in that said selecting means selects an acceptable higher odd numbered inactive full time slot adjacent an active even numbered full time slot.

3. A subscriber unit for use in a time division multiple access (TDMA) communication system, comprising radio transceiving means, control means, means for determining the quality of a TDMA physical channel and a channel map store, wherein the control means in response to a call request for a full time slot transmission has means for determining which of the inactive physical channels in the channel map store is of an acceptable quality and means for initiating a transmission in an inactive full time slot channel of an acceptable quality located adjacent a full time slot active channel.

4. A subscriber unit as claimed in claim 3, wherein the full time slots in a TDMA frame are sequentially numbered in ascending order, characterised in that the control means initiates the transmission in the acceptable higher odd numbered inactive full time slot adjacent an active even numbered full time slot.

1/4

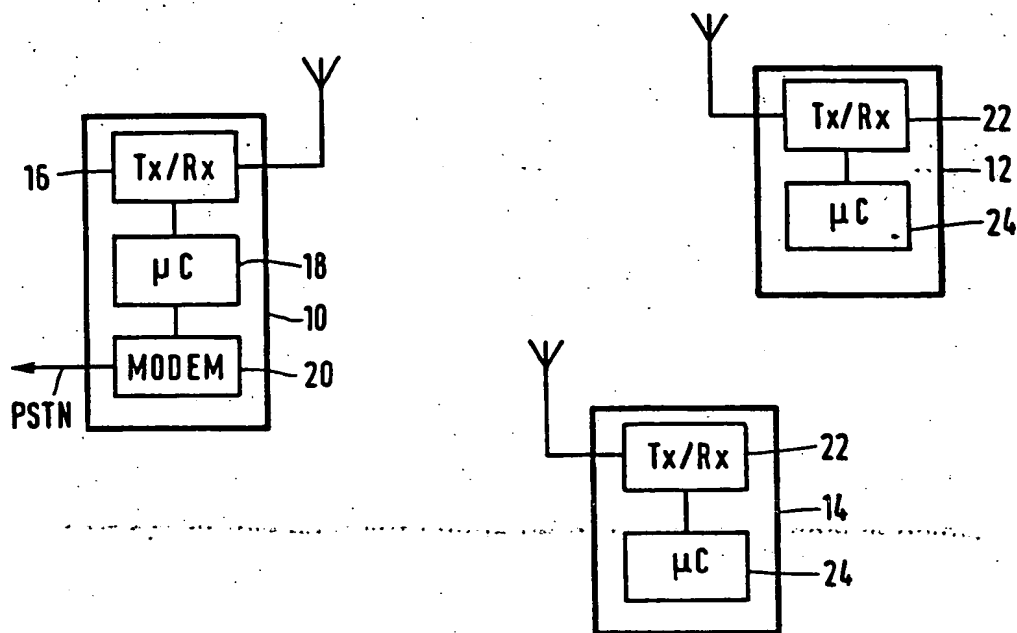


FIG. 1

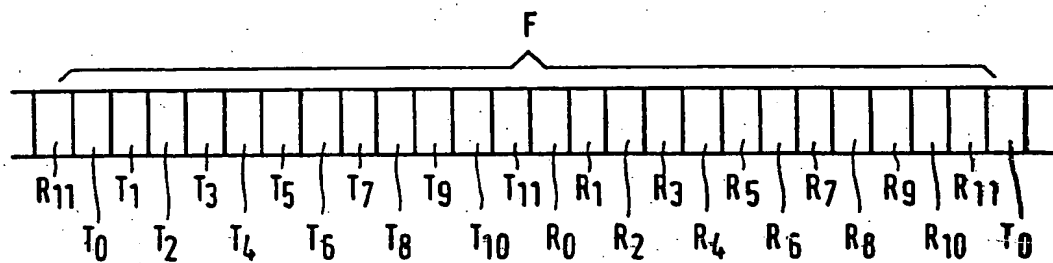


FIG. 2

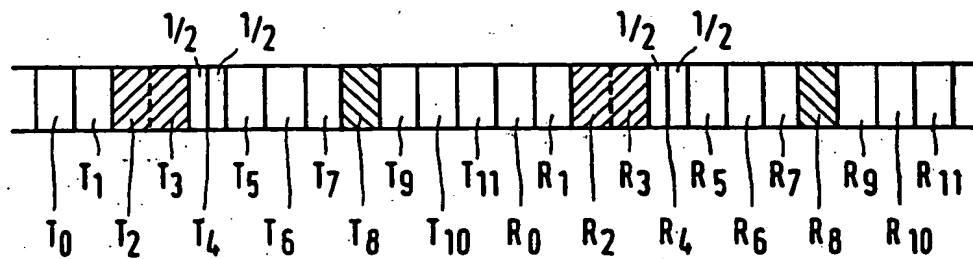


FIG. 3

2/4

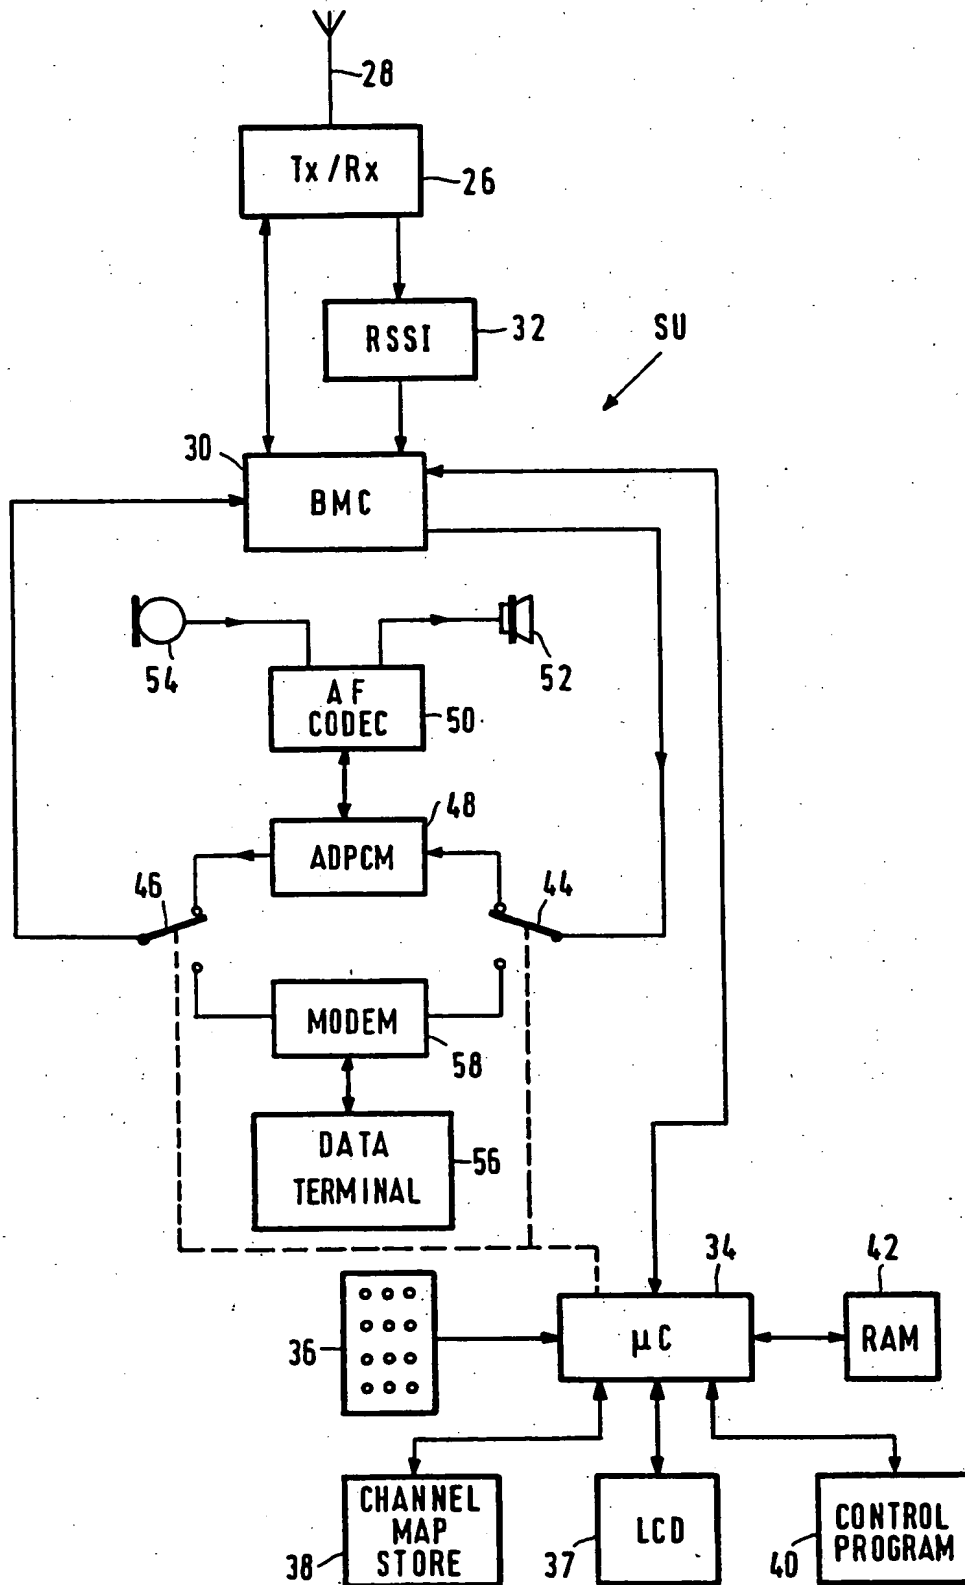


FIG.4

3/4

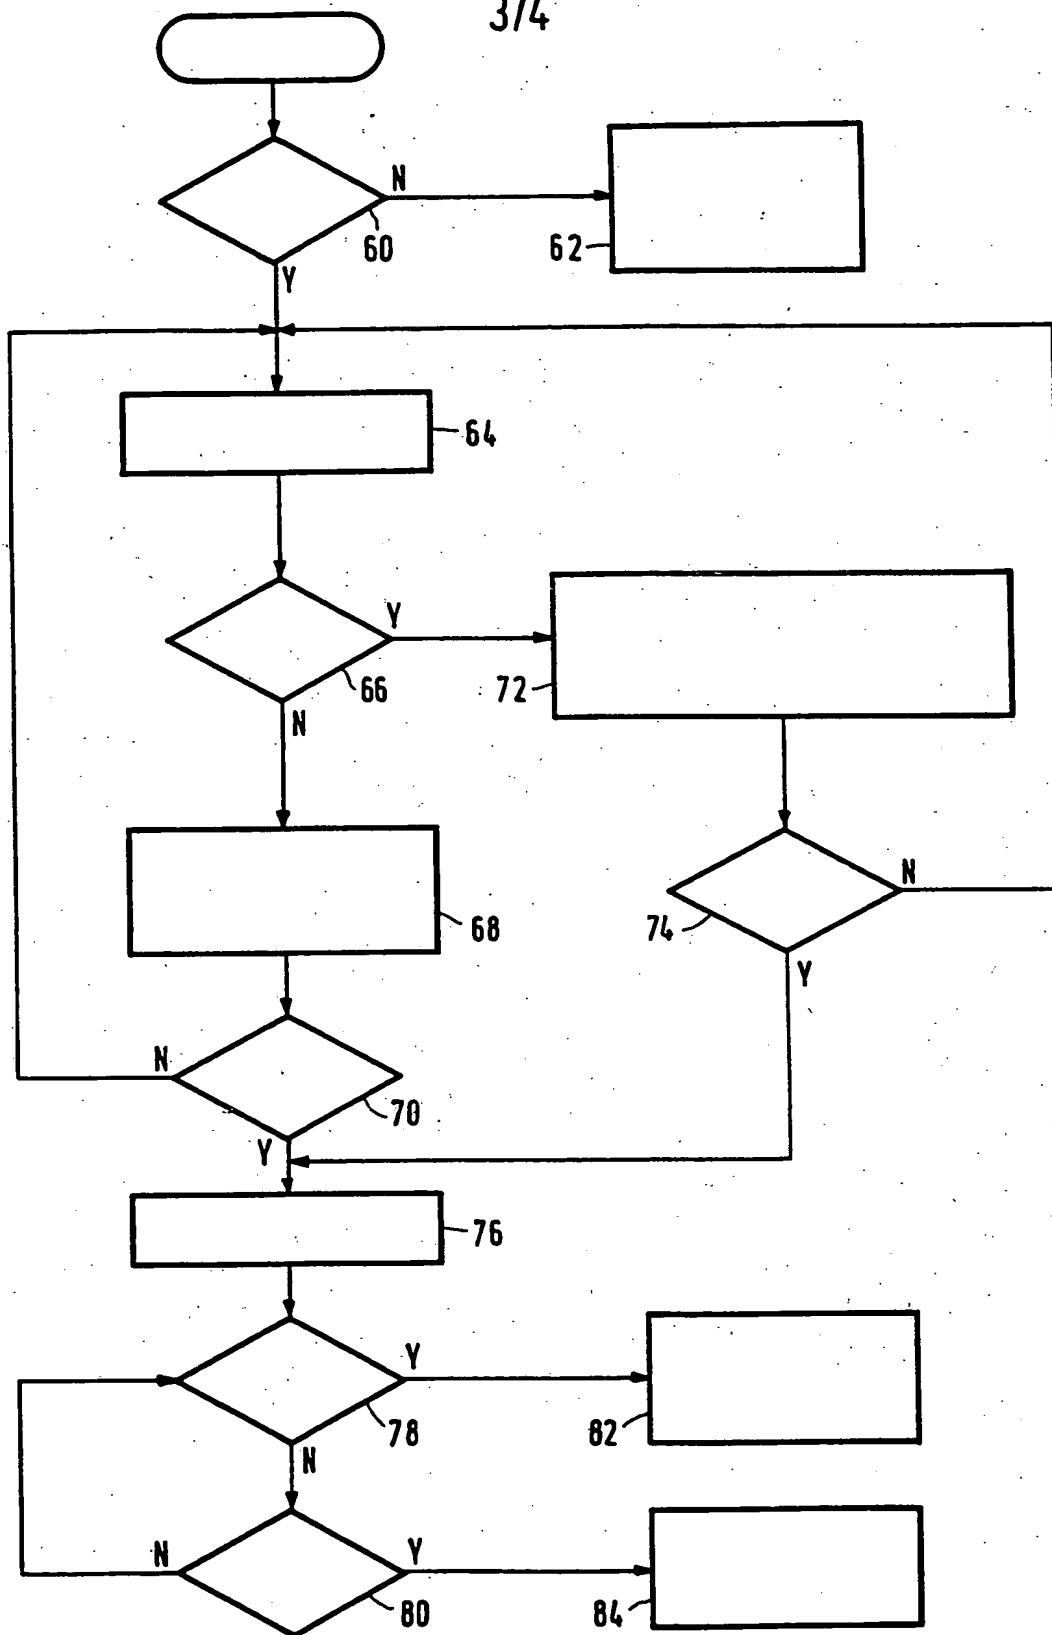


FIG. 5

4/4

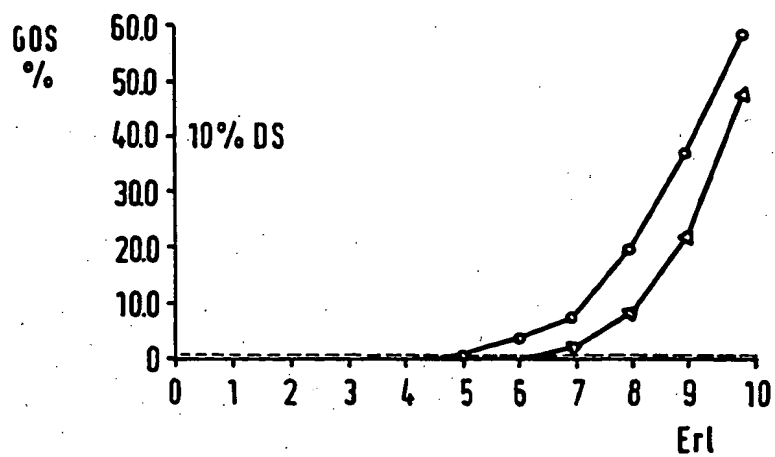


FIG. 6

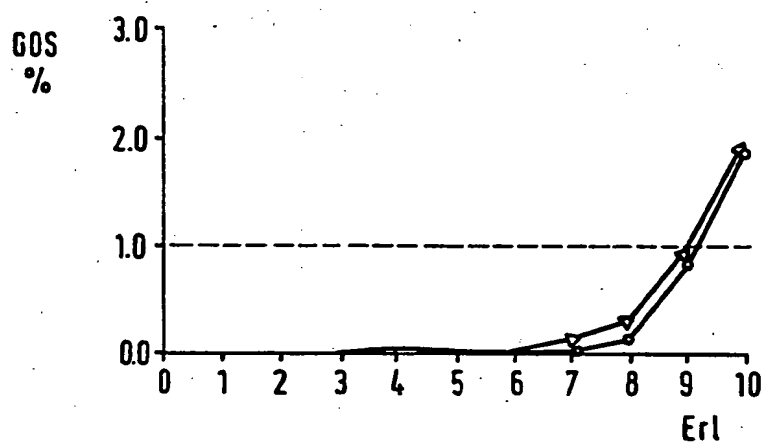


FIG. 7

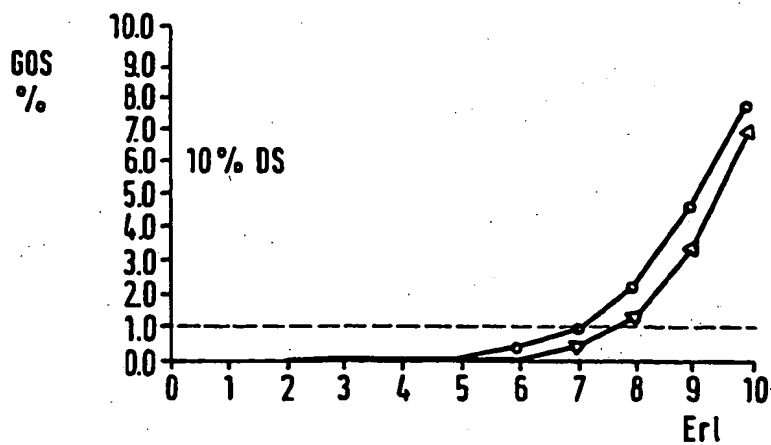


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 95/00009

A. CLASSIFICATION OF SUBJECT MATTER				
IPC6: H04B 7/26 According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols)				
IPC6: H04B, H04Q, H04J				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	Elliott et al: "Supporting diverse services in a microcellular TDMA System", Tenth OK Teletraffic Symposium: "Performance engineering in telecommunications networks", IEE Digest Number 1993/173. 14-16 April 1993. Martlesham Heath. GB. pp 28/1 - 28/9. see page 28/6 lines 15-20 --	1-4		
A	US, A, 3906161 (MAX SCHLICHTE), 16 Sept 1975 (16.09.75), column 3, line 58 - column 4, line 5; column 5, line 25 - line 36 --	1,3		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; border: none;"> * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; vertical-align: top; border: none;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search		Date of mailing of the international search report		
19 May 1995		23 -05- 1995		
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Bengt Jonsson Telephone No. +46 8 782 25 00		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 95/00009

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO, A1, 9316567 (MOTOROLA, INC.), 19 August 1993 (19.08.93), figure 6, abstract -----	1,3

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/04/95

International application No.

PCT/IB 95/00009

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US-A-	3906161	16/09/75	AT-B-	324443	25/08/75
			BE-A,A-	800068	26/11/73
			CH-A-	549925	31/05/74
			DE-A,B,B	2225702	06/12/73
			FR-A,B-	2189969	25/01/74
			GB-A-	1419415	31/12/75
			LU-A-	67662	26/07/73
			NL-A-	7307206	28/11/73
<hr/>					
WO-A1-	9316567	19/08/93	AU-A-	3661593	03/09/93
			CN-A-	1075389	18/08/93
			EP-A,A-	0626121	30/11/94
			FI-A,D-	943312	12/07/94
			US-A-	5203012	13/04/93
<hr/>					

This Page Blank (uspto)